

greenhouse equipment manufacturer

MARYNIACZYK

RUBBER WHEELS 1.6

Greenhouse trolley



RUBBER WHEELS 1.6

PRODUCT DESCRIPTION

The RUBBER WHEELS 1.6 is designed to move around greenhouses or foil tunnels not equipped with heating pipe system. This type of greenhouse trolley is equipped with pneumatic wheels and a electric steering system. The device uses a scissor system of hydraulic operated platform supported by hydraulic actuator. Access to the platform is made of rungs, which can be easily installed. The pneumatic wheels and powerful drive motor allow the truck to travel on uneven terrain.



The new improvement to the Rubber Wheels trolleys in the form of an electric turning aid allows easy and comfortable working in tight spaces. Two independent motors were used in the front of the device, which allows for tight turns. Rubber Wheels trolley series can be adjusted to your needs - you can choose between budget solution with manual steering and manual working platform or more advanced electric solution.

- *Emergency valve located on the lower frame which enables to lower the platform.*
- *Possibility to buy a trolley with an internal charger – to charge the battery simply plug the cord into the power socket.*
- *Switches and buttons made of steel – the improvement affects the service life,*
- *Tilt sensor informing the user about the loss of stability or deviating from the vertical position,*
- *Hydraulic or Manual platform option*
- *Manual or Electric steering option*




- *New contactless potentiometer resistant to water, dust and shock,*
- *New induction foot switch resistant to water, dust and shock,*
- *Wheel forks made of thinner material. New bearings allow the cart to be easily moved.*
- *Pneumatic wheels and powerful drive motor allow the truck to travel on uneven terrain.*
- *Two independent motors used in the front of the device, which allows for tight turns.*



Specification

<i>Length</i>	<i>1611 mm</i>
<i>Width</i>	<i>769 mm</i>
<i>Height</i>	<i>1515 mm</i>
<i>Weight</i>	<i>280 kg</i>
<i>Lifting speed</i>	<i>17 seconds</i>
<i>Engine power</i>	<i>0,35 kW</i>
<i>Hydraulic Power Pack</i>	<i>0,8 kW</i>
<i>Maximum Platform Height</i>	<i>1685 mm</i>
<i>Minimum Platform Height</i>	<i>610 mm</i>

*Join the group of our
business partners*

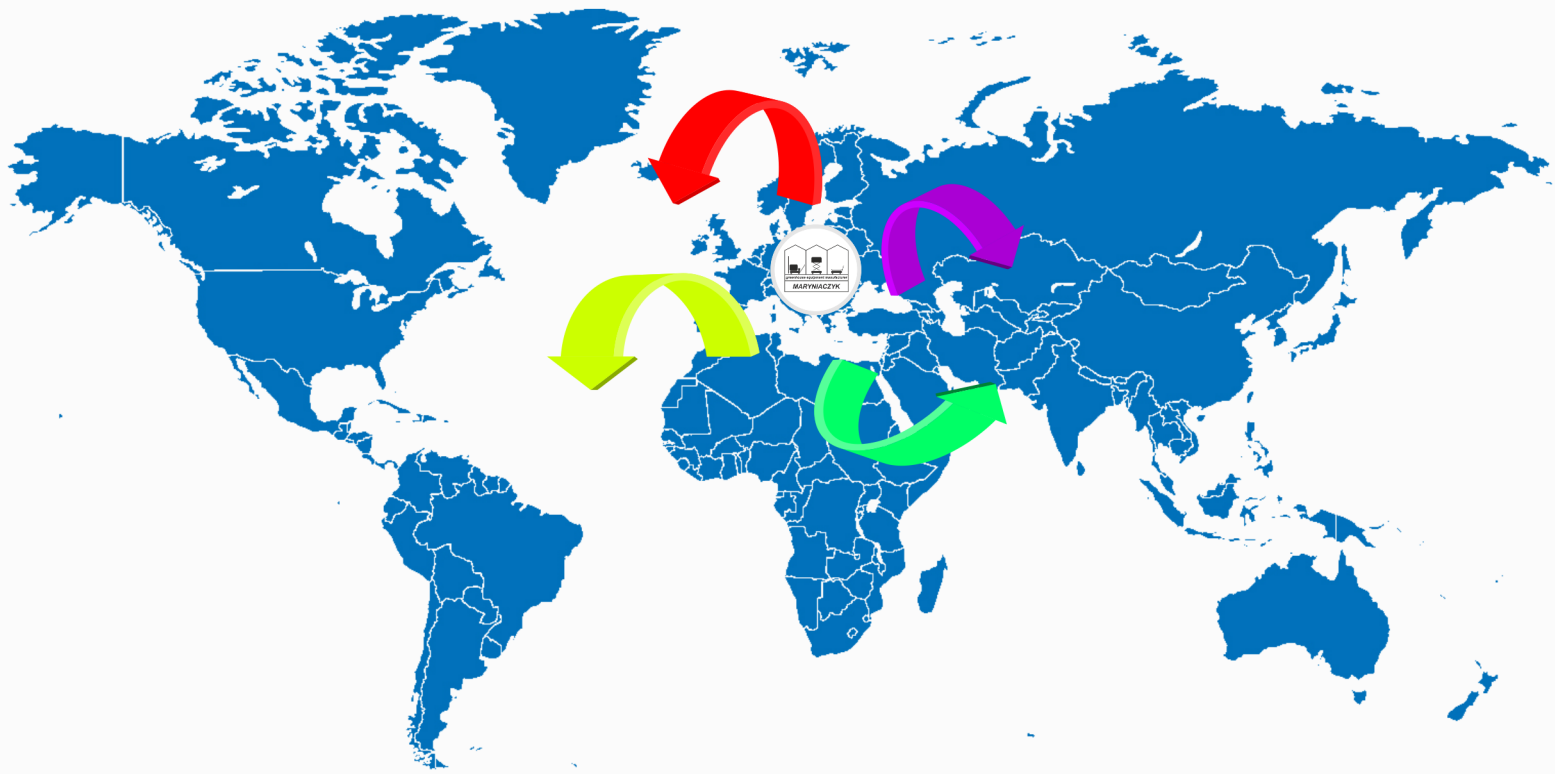

FPHU Maryniaczyk

Domaniew 9a, 98-235 Błaszki

Tel / fax +48 792 823 333

E-mail: sales@maryniaczyk.pl

Web: www.maryniaczyk.com